



Balance Weave SPECIFICATIONS (Cont.)


MESH DESIGNATION	APPROX. MESH	WIRE DIA.	APPROX. OPENING	C.S.A.	WEIGHT SQ. FT.
B-12-10-9	1	.148	.85 x 1.05	.415	2.51
B-12-12-9	1	.148	.85 x .85	.415	2.88
B-12-8-6/10	1	.192 .135	.87 x 1.31	.344	2.25
B-12-8-8/10	1	.162 .135	.87 x 1.34	.344	2.07
B-12-10-9/10	1	.148 .135	.87 x 1.05	.344	2.25
B-12-8-10	1	.135	.87 x 1.37	.344	1.75
B-12-11-10	1	.135	.87 x .96	.344	2.38
B-12-12-10	1	.135	.87 x .87	.344	2.49
B-12-10-10/12	1	.135 .105	.90 x 1.09	.210	1.50
B-12-10-12	1	.105	.90 x 1.09	.210	1.25
B-12-11-14	1	.080	.92 x 1.01	.121	.75
B-18-10-1/4	3/4	.250	.42 x .95	1.765	11.00
B-18-9-6	3/4	.192	.48 x 1.14	1.042	5.28
B-18-10-6	3/4	.192	.48 x .90	1.042	6.45
B-18-12-6	3/4	.192	.48 x .81	1.042	6.65
B-18-12-8	3/4	.162	.51 x .84	.743	4.63
B-18-10-9	3/4	.148	.44 x .97	.622	3.44
B-18-18-9	3/4	.148	.52 x .52	.622	4.63
B-18-17-9/10	3/4	.148 .135	.53 x .56	.515	4.04
B-18-10-10	3/4	.135	.53 x 1.01	.515	2.70
B-18-17-10	3/4	.135	.53 x .57	.515	3.65

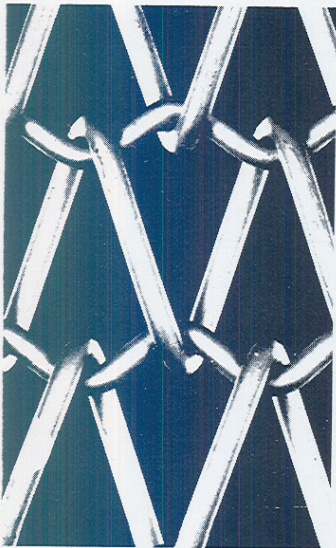

B-12-10-9

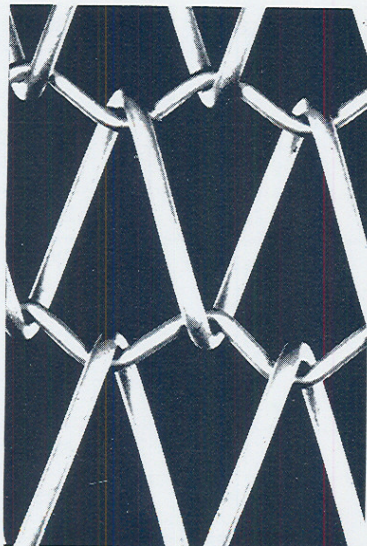

B-12-10-12

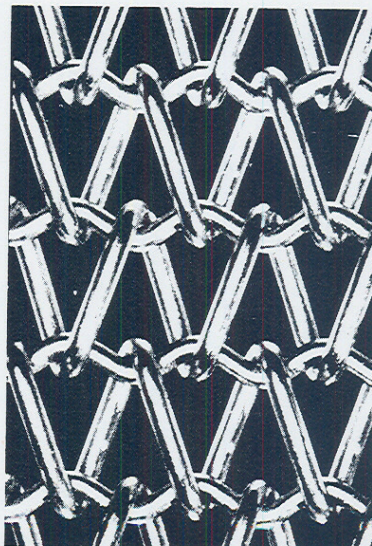

B-18-17-10




B-24-27-12


DESIGNATION	MESH	DIA.	OPENING		SQ. FT.
B-18-17-10/12	3/4	.135 .105	.40 x .55	.315	2.56
B-18-16-11/12	3/4	.120 .105	.56 x .63	.315	2.09
B-18-10-12	3/4	.105	.56 x 1.09	.315	1.65
B-18-16-12	3/4	.105	.56 x .65	.315	2.00
B-18-15-12/14	3/4	.105 .080	.59 x .70	.181	1.30
B-18-15-16	3/4	.063	.60 x .74	.110	.61
B-24-18-10	1/2	.135	.37 x .53	.687	4.50
B-24-20-10	1/2	.135	.37 x .47	.687	4.65
B-24-23-10	1/2	.135	.37 x .39	.687	5.50
B-24-14-10/12	1/2	.135 .105	.39 x .72	.420	2.68
B-24-22-10/12	1/2	.135 .105	.39 x .41	.420	3.50
B-24-25-10/12	1/2	.135 .105	.39 x .35	.420	4.00
B-24-25-11/12	1/2	.120 .105	.39 x .43	.420	3.25
B-24-10-12	1/2	.105	.39 x 1.09	.420	2.18
B-24-22-12	1/2	.105	.39 x .44	.420	2.95
B-24-27-12	1/2	.105	.39 x .34	.420	3.50
B-24-22-12/14	1/2	.105 .080	.42 x .44	.241	2.50
B-24-21-14	1/2	.080	.42 x .49	.241	1.50
B-24-24-14	1/2	.080	.42 x .42	.241	1.57
B-24-27-14	1/2	.080	.42 x .36	.241	1.66
B-24-24-16	1/2	.063	.44 x .44	.147	1.06
B-30-10-10	3/8	.135	.27 x 1.07	.859	4.47
B-30-24-11	3/8	.120	.28 x .38	.684	5.13
B-30-18-10/12	3/8	.135 .105	.29 x .53	.525	3.60
B-30-30-10/12	3/8	.135 .105	.30 x .27	.525	4.97
B-30-28-12	3/8	.105	.30 x .32	.525	4.10
B-30-30-12	3/8	.105	.29 x .29	.525	4.23
B-30-24-12/14	3/8	.105 .080	.32 x .56	.302	2.25
B-30-30-12/14	3/8	.105 .080	.32 x .30	.302	2.71
B-30-18-14	3/8	.080	.32 x .59	.302	1.75
B-30-28-14	3/8	.080	.32 x .35	.302	2.01
B-30-30-14	3/8	.080	.32 x .32	.302	2.35
B-30-26-14/16	3/8	.063	.34 x .38	.184	1.30
B-30-21-16	3/8	.063	.34 x .41	.184	1.13

Balance Weave SPECIFICATIONS (Cont.)


MESH DESIGNATION	APPROX. MESH	WIRE DIA.	APPROX. OPENING	C.S.A.	WEIGHT SQ. FT.
B-30-24-16	3/8	.063	.34 x .44	.184	1.20
B-30-29-16	3/8	.063	.34 x .35	.184	1.25
B-30-36-17	3/8	.054	.35 x .28	.137	1.00
B-30-30-16/18	3/8	.063 .047	.35 x .34	.106	1.00
B-36-10-10	3	.135	.20 x 1.07	1.03	5.45
B-36-18-10/12	3	.135 .105	.23 x .53	.627	4.06
B-36-20-10/12	3	.135 .105	.23 x .52	.627	4.35
B-36-15-12	3	.105	.23 x .69	.627	3.50
B-36-19-12	3	.105	.23 x .56	.627	3.80
B-36-18-12/14	3	.105 .080	.25 x .56	.362	2.75
B-36-24-12/14	3	.105 .080	.25 x .39	.362	2.60
B-36-30-12/14	3	.105 .080	.25 x .30	.362	2.66
B-36-16-14	3	.080	.25 x .67	.362	1.98
B-36-29-14	3	.080	.25 x .33	.362	2.35
B-36-34-14	3	.080	.25 x .29	.362	2.70
B-36-36-14	3	.080	.25 x .25	.362	2.84
B-36-41-14	3	.080	.25 x .22	.362	3.00
B-36-51-14	3	.080	.25 x .16	.362	3.35
B-36-24-15	3	.072	.26 x .43	.293	1.80
B-36-34-14/16	3	.080 .063	.27 x .25	.221	1.85
B-36-30-16	3	.063	.27 x .33	.221	1.45

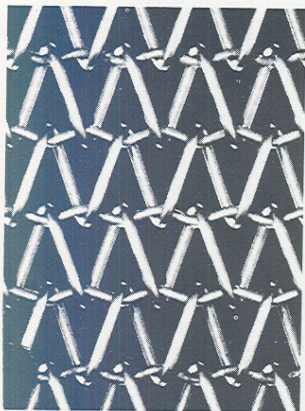


B-30-29-16

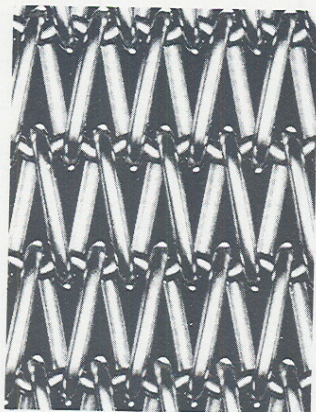

B-36-19-12

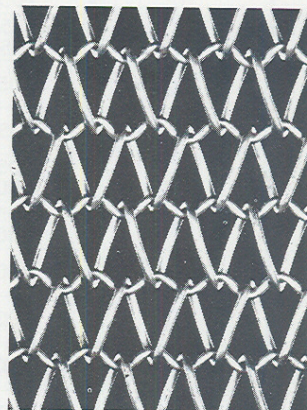

B-36-30-18

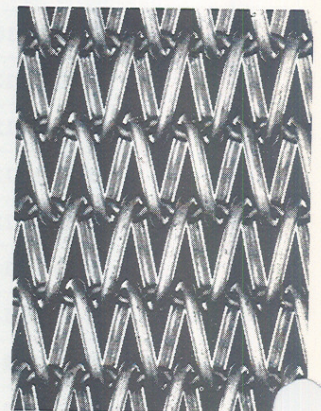

B-42-27-14